




TABULATED DATA SHEET - ALUMINUM SHIELD WHEEL KIT

MAXIMUM LOAD PER AXLE = 1000 LBS

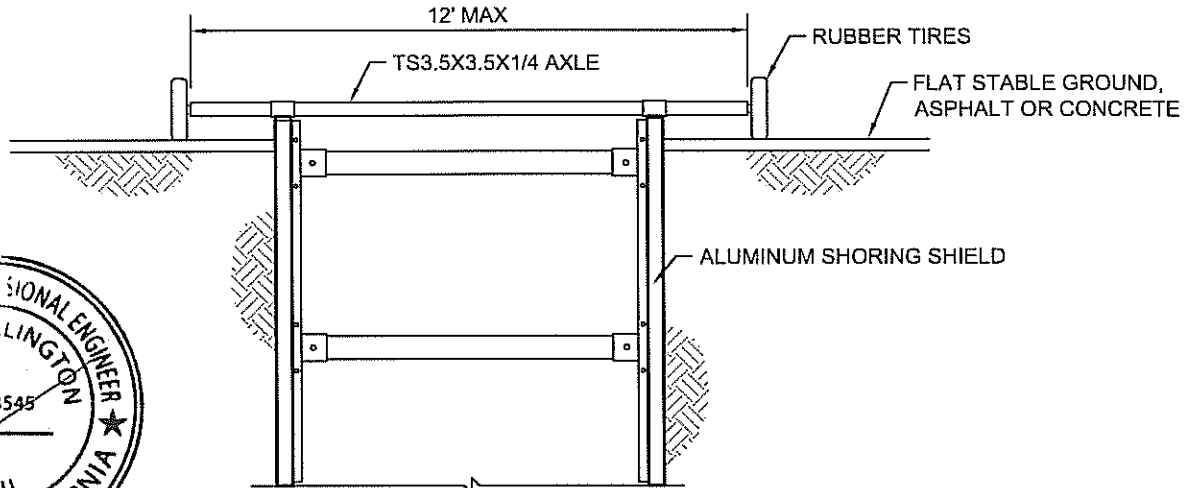

APR 18 2018 *Renew*

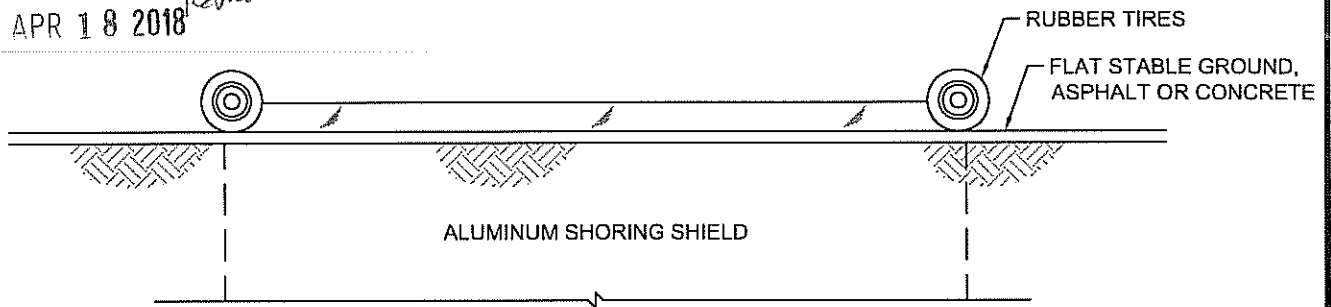

NOTES:

1. WHEEL KIT INTENDED FOR USE WITH ALUMINUM SHORING SHIELDS. REFER TO TABULATED DATA FOR ALUMINUM SHIELDS FOR ALLOWABLE DEPTHS AND SHIELD RATINGS.
2. AXLE TO BE CONSTRUCTED WITH MINIMUM ASTM A36 STEEL (MIN Fy = 36 KSI).
3. WHEEL KIT TO BE USED WHERE WHEELS CAN RUN ON FLAT STABLE GROUND, ASPHALT OR CONCRETE.
4. WHEEL KIT MUST BE FULLY ASSEMBLED PRIOR TO PLACING SHIELD INSIDE THE EXCAVATION.
5. SHIELDS MAY BE STACKED (WITH APPROPRIATE STACKING PINS), AS LONG AS MAXIMUM LOAD IS NOT EXCEEDED.
6. COMPETENT PERSON TO INSPECT WHEEL KIT PRIOR TO USE TO VERIFY SHIELD IS IN GOOD WORKING CONDITION WITH NO SUBSTANTIAL DAMAGE OR DEFORMATIONS.
7. REPAIRS OR MODIFICATIONS TO THIS SHIELD MUST BE APPROVED BY THE MANUFACTURER IN WRITING.

ALUMINUM SHIELD WHEEL KIT

**SACRAMENTO SHORING
SUPPLY, INC.**

P.O. BOX 2912
CARMICHAEL, CA 95609

PH: (916) 920-9143 FAX: (916) 920-3305

HARTMAN
Civil Engineering, Inc.

P.O. Box 2958 Office: (707) 763-2862
Petaluma, CA 94953 Fax: (707) 773-2953

DATE: 11/04/08 SHEET: 1 OF 1 JOB#: 1226-1/P1



12/07/15